



XM1246

Reliability. Security. Productivity.



XM1246 with optional trays



This is a Class A device according to the FCC Rules and international electromagnetic emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

Lexmark XM1246

Mid-size workgroups can work fast and still run economically with the XM1246 Series, the up-to 46 page-per-minute* multifunction product with long-life components that rarely need replacement. A quad-core processor joins 2 GB of memory to power through big jobs, while a durable design keeps things moving.



Get more done


- ▶ Print, copy, scan and fax with the power of a multi-core processor and 2 GB of memory.
- ▶ Get up to 46-page-per-minute printing and scan up to 90 images per minute.
- ▶ Intuitive 4.3-inch color touch screen offers smooth, tablet-like interaction.
- ▶ Built-in productivity apps save time and improve efficiency.

Ready when you are

- ▶ Long-life fuser and imaging components extend uptime.
- ▶ Unison™ Toner replacement cartridges deliver up to 21,000 pages** of high-quality printing.
- ▶ Maximum input capacity of 2000 pages means fewer interruptions.
- ▶ Durable metal frame is designed for longevity.

Robust, built-in security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—on the document, the device, over the network, and everywhere in between.
- ▶ A range of embedded features harden device against attacks.
- ▶ Go beyond standard Confidential Print with optional security solutions like Print Release.
- ▶ Keypoint Intelligence - Buyers Lab honored Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security***.

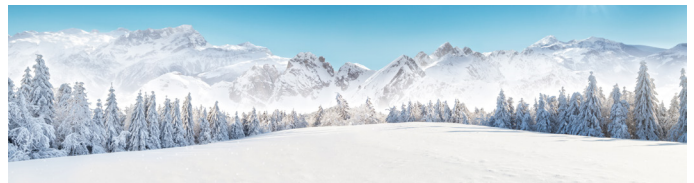

Built for planet earth

- ▶ Energy management features reduce power consumption in active use or sleep mode.
- ▶ Standard two-sided printing saves paper.
- ▶ Use of post-consumer recycled content in manufacturing saves natural resources.
- ▶ Device is rated EPEAT® Silver and ENERGY STAR® certified.
- ▶ Recycle cartridges through the award-winning Lexmark Cartridge Collection Program (LCCP).

*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

**Average yield based on approximately 5% print coverage

***Award based on North America and/or Western Europe data

Lexmark XM1246



- 1 Multifunction product with 4.3-inch (10.9 cm) color touch screen
18.8 x 19.3 x 16.9 inches
477 x 489 x 429.5 mm
- 2 550-sheet tray
5 x 15.7 x 14.7 inches
126 x 389 x 374 mm
- 3 250-sheet tray
3.7 x 15.7 x 14.7 inches
95 x 389 x 374 mm

Standard

Optional

Supports up to three optional trays.

| | |
|------------|--|
| P/N | Hardware |
| 36S0860 | Lexmark XM1246 |
| P/N | Cartridges and supplies |
| 24B6886 | Black Lexmark toner cartridge |
| P/N | Paper handling |
| 36S2910 | 250-sheet tray |
| 36S3110 | 550-sheet tray |
| 36S3120 | 550-sheet lockable tray |
| P/N | Memory options |
| 57X9801 | 256 MB user flash memory |
| P/N | Application solutions |
| 40C9200 | Forms and bar code card |
| 40C9201 | IPDS card |
| 40C9202 | PRESCRIBE card |
| 57X9810 | Traditional Chinese font card |
| 57X9812 | Simplified Chinese font card |
| 57X9814 | Korean font card |
| 57X9815 | Japanese font card |
| P/N | Connectivity |
| 27X6410 | MarkNet N8372 (front wifi - FSM) |
| 27X0900 | RS-232C serial interface card |
| 27X0901 | Parallel 1284-B Interface Card |
| 27X0912 | MarkNet N8230 fiber ethernet 100BASE-FX(LC), 1000BASE-SX(LC) |
| 1021231 | Parallel cable (10 ft.) |
| 1021294 | UB 2.0 cable (2 meter) |
| P/N | Furniture |
| 3073173 | Swivel cabinet |
| 35S8502 | Adjustable printer stand |
| P/N | User replaceable parts |
| 41X1324 | DADF Flatbad cushion |
| 41X0918 | Pick tires |
| 41X1239 | Optional pick tray roller |
| 41X1325 | DADF Separator roller |
| 41X1326 | DADF Pick roller |

© 2018 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint and the AirPrint Logo are trademarks of Apple, Inc. ENERGY STAR® is a U.S. registered mark. EPEAT® is a trademark of EPEAT, Inc. in the United States and other countries. Google Cloud Print is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

Product specifications

Lexmark XM1246

Printing

| | |
|--|---|
| Display | Lexmark e-Task 4.3-inch (10.9 cm) color touch screen |
| Print Speed: Up to ⁴ | Black: 46 ppm |
| Time to First Page: As fast as | Black: 6 seconds |
| Print Resolution | Black: 1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 600 x 600 dpi |
| Memory / Processor | Standard: 2048 MB / Maximum: 2048 MB / Quad Core, 1200 MHz |
| Hard Disk | Option available |
| Recommended Monthly Page Volume ² | 2000 - 15000 pages |
| Maximum Monthly Duty Cycle: Up to ³ | 120000 pages per month |

Copying

| | |
|--------------------------------|------------------|
| Copy Speed: Up to ⁴ | Black: 46 cpm |
| Time to First Copy: As fast as | Black: 6 seconds |

Scanning

| | |
|----------------------------------|---|
| Scanner Type / ADF Scan | Flatbed scanner with ADF / DADF (single pass Duplex) |
| A4/Ltr Duplex Scan Speed: Up to | Black: 84 / 90 sides per minute / Color: 44 / 48 sides per minute |
| A4/Ltr Simplex Scan Speed: Up to | Black: 42 / 45 sides per minute / Color: 22 / 24 sides per minute |
| ADF Paper Input Capacity: Up to | 50 pages 20 lb or 75 gsm bond |

Faxing

| | |
|-------------|---------------------------------------|
| Modem Speed | ITU T.30, V.34 Half-Duplex, 33.6 Kbps |
|-------------|---------------------------------------|

Supplies⁶

| | |
|--|--|
| Laser Cartridge Yields (up to) ¹ | 21,000-page Cartridge |
| Imaging Unit Estimated Yield: Up to ⁵ | 60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage |
| Cartridge(s) Shipping with Product ⁸ | 6,000-page Starter Return Program Toner Cartridge |

Paper Handling

| | |
|------------------------------|---|
| Included Paper Handling | 100-Sheet Multipurpose Feeder, 150-Sheet Output Bin, 250-Sheet Input, Integrated Duplex |
| Optional Paper Handling | 250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray |
| Paper Input Capacity: Up to | Standard: 350 pages 20 lb or 75 gsm bond / Maximum: 2000 pages 20 lb or 75 gsm bond |
| Paper Output Capacity: Up to | Standard: 150 pages 20 lb or 75 gsm bond / Maximum: 150 pages 20 lb or 75 gsm bond |
| Media Types Supported | Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide. |
| Media Sizes Supported | 10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6 |

General Information⁷

| | |
|---|--|
| Standard Ports | One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A) |
| Optional Network Ports / Optional Local Ports | Marknet N8372 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel |
| Noise Level: Operating | Print: 56 dBA / Copy: 56 dBA / Scan: 55 dBA |
| Specified Operating Environment | Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 5000 Meters (16,404 Feet) |
| Size (in. - H x W x D) / Weight (lb.) | 18.8 x 19.3 x 16.9 in. / 45.5 lb. |

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to the FCC Rules and international electromagnetic emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

¹Average yield based on approximately 5% print coverage. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details. ⁷Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁸Average Continuous Cartridge Yield in one-sided (simplex) mode 6,000 standard pages. Declared yield value in accordance with ISO/IEC 19752.